


# INDUSTRIAL HOSE REELS

- Open Spool Hose Reels
- Automatic Spring Rewind • Multi-position Roller Hose Guide

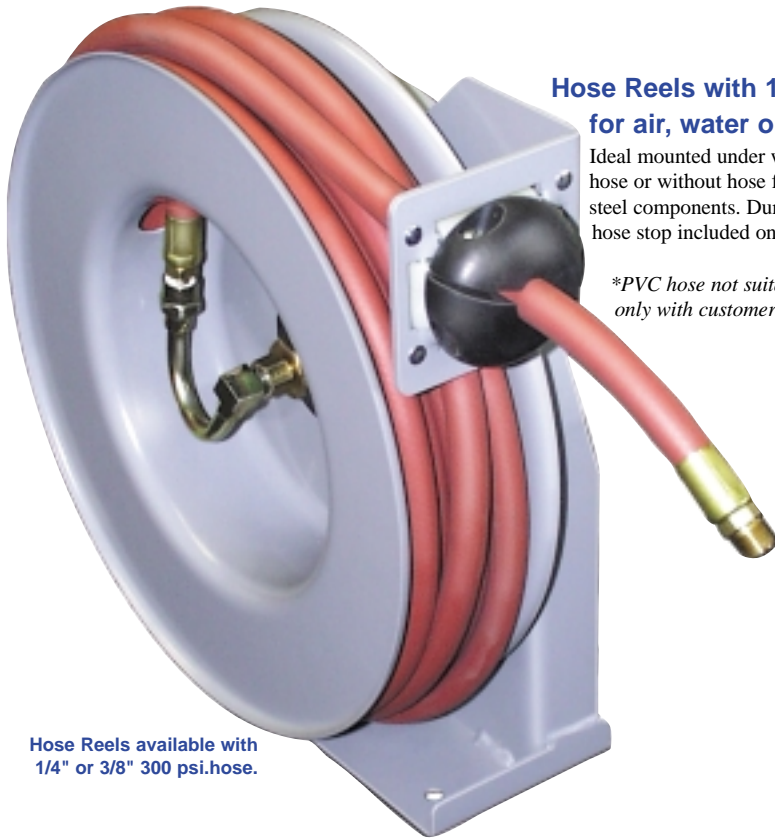

Hose Reels with 1/4" or 3/8" i.d. hose for air, water or oil\*.

Ideal mounted under workbench. May also be hung from wall or ceiling. Available with PVC hose or without hose for customer installation. Reels feature spring rewind with ratchet lock. All steel components. Durable black and gray baked polyester finish. Inlet is 3/8"NPTF. Adjustable hose stop included on models which include hose.

\*PVC hose not suitable for use with oil. Oil may be used only with customer supplied oil resistant hose.




Hose Reels available with 1/4" or 3/8" 300 psi.hose.

## MODEL LIST-HOSE REELS

Includes Hose	Max. Pressure** psi (bar)	HOSE DATA*				Hose Material	Weight lbs. (kg)	Model
		I.D. in (mm)	O.D. in (mm)	Length ft. (m)				
No	500 (35)	1/4 (6)	.500 (13)	35' (11)	ar	17 (8)	GRC2500A	
No	500 (35)	3/8 (10)	.640 (16)	25' (8)	ar	17 (8)	GRC3800A	
Yes	300 (21)	1/4 (6)	.500 (13)	25' (8)	PVC	19 (9)	GRC2525A	
Yes	300 (21)	1/4 (6)	.500 (13)	35' (11)	PVC	20 (9)	GRC2535A	
Yes	300 (21)	3/8 (10)	.640 (16)	25' (8)	PVC	22 (10)	GRC3825A	

\* Maximum recommended hose size and length for reels supplied without hose.

\*\*500 psi maximum pressure for reel only. Rate system per customer installed hose. 300 psi maximum pressure with hose supplied on reels.

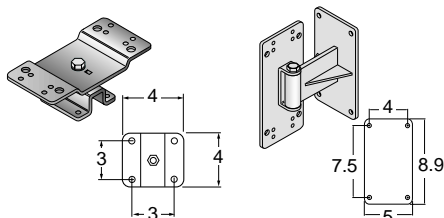

**Optional 340° Pivot Base**  
Model RC-PB-B (left, above)  
Reel follows activity for smoother operation, reduced hose wear.

**Optional Wall Mounted Pivot Base**  
Model RC-WP (right, above)  
Provides 180° pivot.

## HOSE REEL DIMENSIONS—inches (mm)

